



过渡接头 ADAPTER

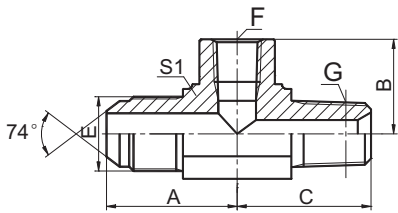

KJNN

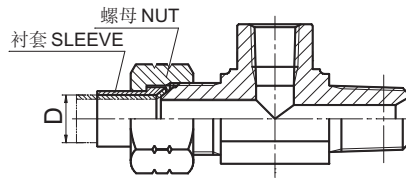

KJNN-RN

JIC外螺纹/布锥管内螺纹/布锥管外螺纹
 JIC MALE/NPT FEMALE/NPT MALE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS					
	E	F	G		A	B	C	S1	
KJNN-04-02-02	7/16"X20	Z1/8"X27	Z1/8"X27		26.5	16.8	24.5	16	
KJNN-04	7/16"X20	Z1/4"X18	Z1/4"X18		29.5	22.4	28	19	
KJNN-06-04-04	9/16"X18	Z1/4"X18	Z1/4"X18		30	22.4	28	19	
KJNN-06	9/16"X18	Z3/8"X18	Z3/8"X18		33.5	25.9	33.5	24	
KJNN-08-06-06	3/4"X16	Z3/8"X18	Z3/8"X18		36	25.9	33.5	24	
KJNN-08	3/4"X16	Z1/2"X14	Z1/2"X14		39.5	31.2	41.2	30	
KJNN-10-08-08	7/8"X14	Z1/2"X14	Z1/2"X14		42.5	31.2	41.2	30	
KJNN-12	1.1/16"X12	Z3/4"X14	Z3/4"X14		48	34.5	45.2	33	
KJNN-14-12-12	1.3/16"X12	Z3/4"X14	Z3/4"X14		48.5	34.5	45.2	33	
KJNN-16	1.5/16"X12	Z1"X11.5	Z1"X11.5		55.1	41.1	54.5	41	

注：螺母及衬套需另行订货。管子直径D为公制时， 配用螺母及衬套分别选用NB200、NB500。管子直径为英制时， 配用螺母及衬套分别选用NB200、NB300。 Nut and sleeve should be ordered separately.The nut NB200 and sleeve NB500 is suitable for metric tube,the nut NB200 and sleeve NB300 is suitable for inch tube.